

TraceTek TT3000 sensing cable detects the presence of conductive liquids at any point along its length. Most acids and bases and even deionized water can be sensed and located. Installed with a TraceTek alarm and locating module, the cable senses the presence of fluid, triggers an alarm, and pinpoints the location.

**Distributed sensing**

TT3000 sensing cable provides distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.

**Design flexibility**

TT3000 sensing cable is available with factory-installed metal connectors that plug together. The measurement circuit is not dependent upon the conductivity of the leaking fluid.


Therefore, the same cable will detect a wide range of fluids without special design considerations or calibration.

The cable is designed for a variety of applications, including floor surfaces, subfloors, equipment locations, pipes, storage tanks, and trenches. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows quick drying.

**Advanced technology**


Raychem's conductive-polymer technology and fluoropolymer construction make TT3000 sensing cable mechanically strong and chemically resistant. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluoropolymer carrier rod. This rugged construction exposes no metal, and enables the cable to be reusable even in corrosive environments.

**Ordering information**




**TT3000 zone sensing cable with factory-installed connector and end termination**

Catalog number	Description
TT3000-Zone-MC	5-ft (1.5-m) sensing cable with preinstalled heat-shrink end termination



**TT3000 modular sensing cables with factory-installed connectors**

Catalog number	Description
TT3000-0.3M/1FT-MC	1-ft (0.3-m) sensing cable
TT3000-1M/3FT-MC	3-ft (1-m) sensing cable
TT3000-1.5M/5FT-MC	5-ft (1.5-m) sensing cable
TT3000-3M/10FT-MC	10-ft (3-m) sensing cable
TT3000-4.5M/15FT-MC	15-ft (4.5-m) sensing cable
TT3000-7.5M/25FT-MC	25-ft (7.5-m) sensing cable
TT3000-15M/50FT-MC	50-ft (15-m) sensing cable
TT3000-30M/100FT-MC	100-ft (30-m) sensing cable



**TT3000 bulk sensing cable** (connector kits required)




*for installation in double-containment piping*

Catalog number	Description
TT3000-SC	Bulk sensing cable on reel Minimum length: 250 ft (75 m) Maximum length: 1000 ft (300 m)

*Connector kits (not shown):*

TT3000-CK-MC-M/F	Components for five mated pairs of connectors
<i>(includes test tools)</i>	
TT3000-CK-MC-M	One pin-type connector
TT3000-CK-MC-F	One socket-type connector

# TT3000 Sensing Cable for Conductive Liquids

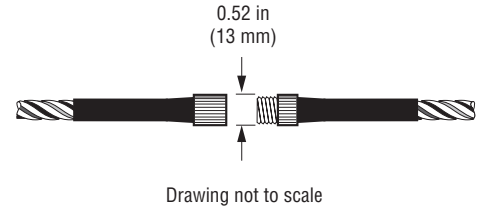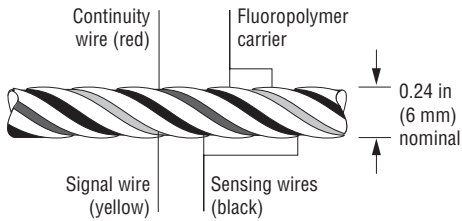

## Product characteristics

Cable diameter	0.24 in (6.0 mm) nominal
Continuity diameter with connector	0.52 in (13 mm) nominal
Continuity and signal wires	2 x 26 AWG with insulation of fluoropolymer
Sensing wires	2 x 30 AWG with jacket of conductive fluoropolymer
Carrier	Fluoropolymer
Cable weight (50-ft length)	2.3 lb

## Technical information

Breaking strength	160 lb
Cut-through force	>50 lb with 0.005-in blade; crosshead speed 0.2 in/min
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	Sensing cable: 194°F (90°C) Cable connectors: 185°F (85°C)

## Chemical resistance

Cable functions normally after exposure in accordance with ASTM D 543 at 77°F (25°C) for seven days:	Trichloroethylene (100%) Sulphuric acid (98%) Hydrochloric acid (37%) Hexane (100%) Methanol (100%) Sodium hydroxide (10%) Xylene (100%) Aqua regia
--	--

**Note:** Prolonged exposure to concentrated ketones may cause temporary reduction of sensitivity; consult factory.

## Radiation resistance

Cumulative radiation exposure of 10-megarad gamma radiation over design life of 30 years.

## Approvals



Sensing cable may be used in Class I, Division 2, Groups A, B, C, D Hazardous Locations. If wiring from module meets requirements for intrinsic safety, sensing cable may be used in Class I, Division 1, Groups A, B, C, and D Hazardous Locations (Zone 0 or Zone 1 in Europe).



The TraceTek products group is a part of Raychem HTS, Tyco International. Raychem HTS is ISO 9001 certified.

**Important:** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.



**Raytech** VertriebsgmbH  
Industriestrasse B-4  
A-2345 Brunn/Gebirge  
T. +43 2236 90300  
F: +43 2236 90300/1099  
sales@tracetek.at  
www.tracetek.at

**Raytech** Vertriebsbüro West  
Veilchenweg 13  
A-4210 Gallneukirchen  
T. +43 7235 66910  
F: +43 7235 66911  
sales@tracetek.at  
www.tracetek.at